



DESIGNLIGHT

SCANDINAVIAN AB

LED-PANEL, SIXTY

E-NR: 70 268 32

LP-60x60MW4KD


EFFEKT POWER	KELVIN KELVIN	ARMATURFÄRG LUMINAIRE COLOUR	LUMEN (LM) LUMEN (LM)	KUPA DIFFUSER
36W	4000K	VIT/WHITE RAL9003	3600LM	PMMA MED PRISMATISKT MÖNSTER

RoHS CE



LIFETIME
L70: 180.000H
L80: 113.000H



LIFETIME DRIVER
70.000H

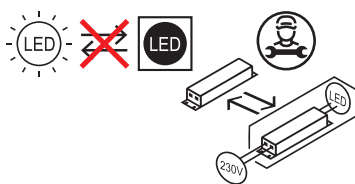

- UGR19
- DALI MED SNABBKOPPLING
- ELEGANT VIT (RAL9003)
- LÄTTMONTERAD



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

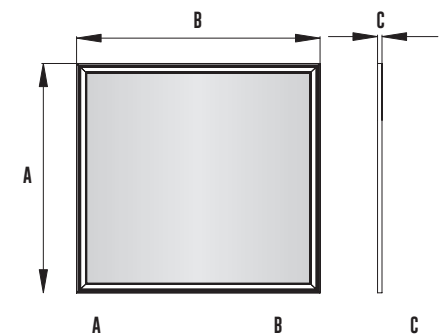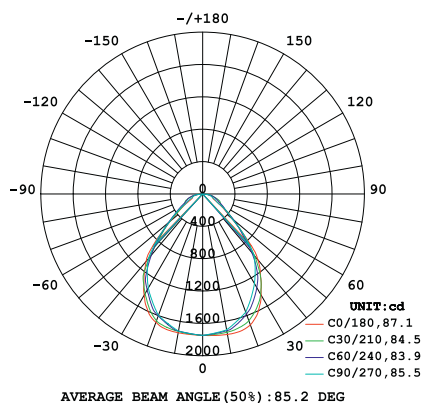


MÅTT MM

MIN. MM	MAX. MM	MIN. MM	MAX. MM	MIN. MM
594	596	594	596	8



SNABBKOPPLING/QUICK CONNECTION



ENERGY

Designlight Scandinavian AB
LP-60x60MW4KD

A
B
C
D
E
F
G

36
kWh/1000h

2019/2015



1.900K STEARINLJUS CANDLE	2.700- 3.000K VARMVIT WARM WHITE	4.000- 4.500K NATURLIG VIT NATURAL WHITE	4.800K SOLLJUS DIRECT SUN	5.000- 5.000K VITT DAGSLJUS DAY WHITE	7.000- 7.500K KALLVIT COOL WHITE	10.000K BLÅ HIMMEL BLUE SKY
---------------------------------	---	---	---------------------------------	--	---	-----------------------------------

LÄS MER OM VÅRA GARANTIVILLKOR PÅ WWW.DESIGNLIGHT.NU READ MORE ABOUT OUR WARRANTY CONDITIONS AT: WWW.DESIGNLIGHT.NU

⚠ SÄKERHET:

- 1 Läs igenom hela manualen noggrant före installation.
- 2 Försäkra dig om att spänningen är fränslagen före installation eller underhåll.
- 3 Installation ska utföras av behörig elektriker.
- 4 Panel och Driver är utbytbara av behörig elektriker.

⚠ SAFETY:

- 1 Read the entire manual carefully before installation.
- 2 Make sure that the voltage is switched off before installation or maintenance.
- 3 Installation must be performed by a qualified electrician.
- 4 Panel and Driver can be replaced by a qualified electrician.

DESIGNLIGHT
SCANDINAVIAN AB

DESIGNLIGHT SCANDINAVIAN AB · TOFFELVÄGEN 1 · SE-342 60 MOHEDA · SWEDEN
TELEFON/PHONE +46 (0)472-716 10 · INFO@DESIGNLIGHT.NU · WWW.DESIGNLIGHT.NU